
Attic Master and Upgrade Usage and Maintenance instructions

Ladder usage.

Stand behind the hatch when lowering your ladder from the ceiling.
Stand at the side of the ladder with your hand on the kick board edge (1) when unfolding the ladder.


Do not use the hatch edge to open or close the ladder (always use the kick board)

When unfolding the ladder in a hallway or other confined area, lower the hatch from behind and then move to the front of the ladder and carefully unfold the ladder from that position.

Always face the ladder while climbing up or down

Do not use the ladder arm as a hold while climbing the ladder

Use the ladder hand rail to increase your stability wherever possible

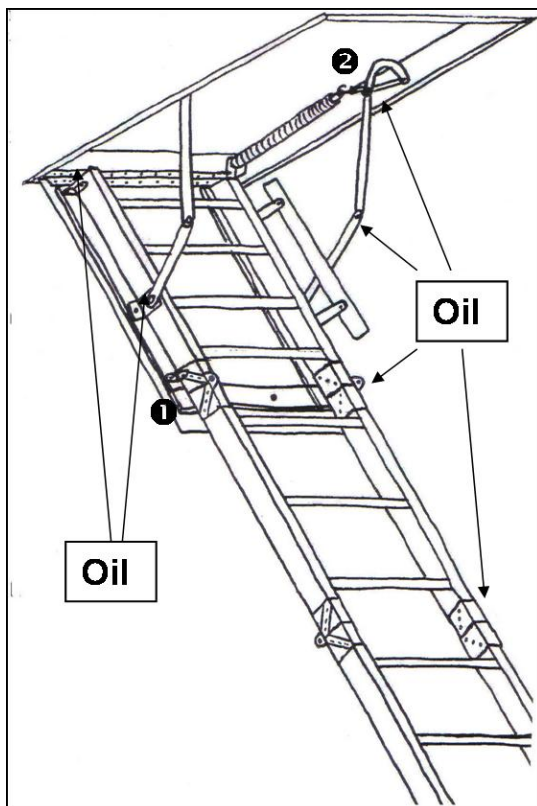

Maintenance

Check all nuts bolts and fastenings for tightness every 50 operations.

The "j" bolts on the arms (2) can be used to adjust lid closure.

Important:

Do not allow the lid of your ladder to slam as this may cause damage and void your warranty

Lubrication

Apply light machine oil (sewing machine oil) to all moving parts as shown in the diagram.

Do not use kerosene based oil sprays. (such as WD40)